

Quantitativos Rua Rio de Janeiro


LIMPEZA DE SUPERFÍCIE:
 $268,80+1400,00+263,90=1.932,70 \text{ m}^2$
 $154,47+380,00+128,70=663,17 \text{ m}^2$
 Total de 2.595,87m²

PINTURA DE LIGAÇÃO
 $268,80+1400,00+263,90=1.932,70 \text{ m}^2$
 $154,47+380,00+128,70=663,17 \text{ m}^2$
 Total de 2.595,87m²

REPERFILAGEM CBUQ 5CM
 $2.595,87 \times 0,05 = 129,79\text{m}^3$

CBUQ CAMADA FINAL 5CM
 $2.595,87 \times 0,05 = 129,79\text{m}^3$

SINALIZAÇÃO
 $36,80+36,80+66,00+25,00+25,00+19,20$
 Total = 208,80m²

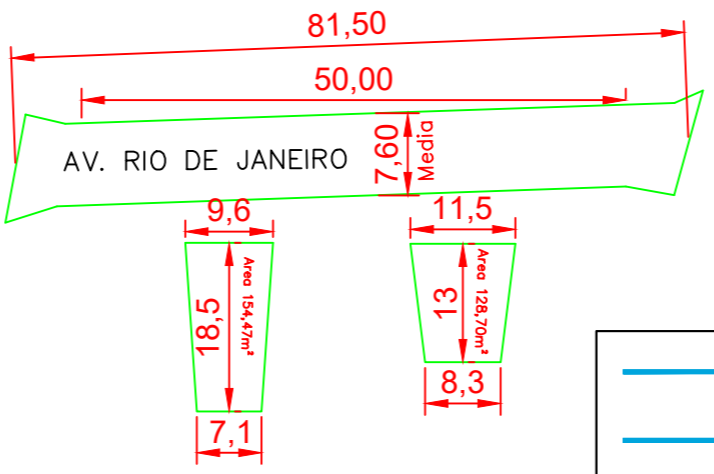

PREFEITURA MUNICIPAL DE ÁUREA

--- SECRETARIA DE OBRAS ---

SOLICITANTE	SECRETARIA DE OBRAS	DATA	JULHO de 2021	ESCALA	S/E	DESENHO
ASSUNTO	PLANTA BAIXA	LOCAL	AV RIO DE JANEIRO	AUREA - RS		PRANCHA
RESP. TÉCNICO	MAURÍCIO ZANELLA PIAIA - ENGENHEIRO CIVIL - CREA 139286-D					

03/05